
KBU10005 thru KBU1010

10 A Single-Phase Silicon Bridge Rectifier

Rectifier Reverse Voltage 50 to 1000V

Features

- Ideal for P.C. Board mounting
- High surge current capability
- This series is UL listed under the Recognized Component Index, file number E142814
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- High temperature soldering guaranteed 265°C /10 seconds at 5 lbs (2.3kg) tension

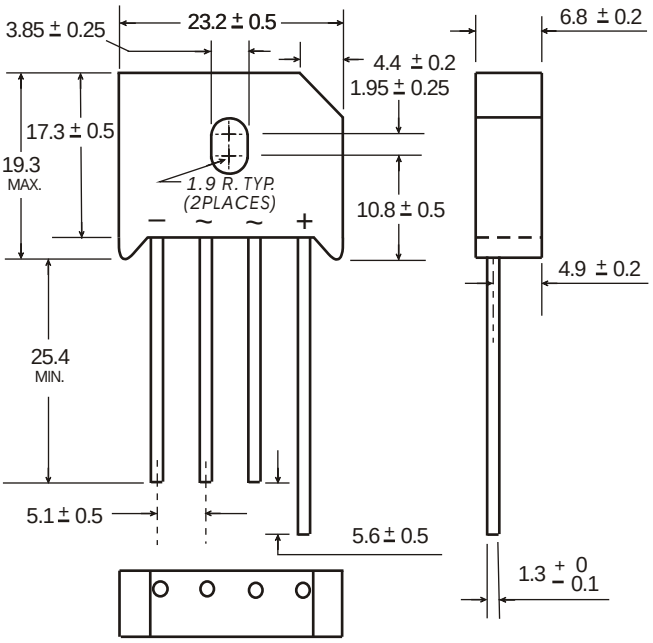

Dimensions in millimeters(1mm =0.0394")

Mechanical Data

Case: Molded plastic body
Terminals: Plated leads solderable per MIL-STD-202, Method 208
Polarity: Polarity symbols molded on body
Mounting Position:: Any
Mounting Torque: 5 in-lbs max.
Weight: 0.3 ounce, 8.0 grams (approx)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	KBU 10005	KBU 1001	KBU 1002	KBU 1004	KBU 1006	KBU 1008	KBU 1010	unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at T_A=100°C	$I_{F(AV)}$	10							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	300							A
Rating for fusing (t<8.3ms)	I^2t	300							A^2sec
Typical thermal resistance per element (1)	$R_{\theta JA}$	2.7							°C / W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to + 150							℃

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	KBU 10005	KBU 1001	KBU 1002	KBU 1004	KBU 1006	KBU 1008	KBU 1010	Unit
Maximum instantaneous forward voltage drop per leg at 10A	V_F	1.05							V
Maximum DC reverse current at rated T_A =25°C DC blocking voltage per element T_A =125°C	I_R	10 500							μA

Notes: (1)Thermal resistance from Junction to Ambemt on P.C.board mounting.

Rating and Characteristic Curves (TA = 25°C Unless otherwise noted)
KBU10005 thru KBU1010

Fig. 1 Derating Curve for Output Rectified Current

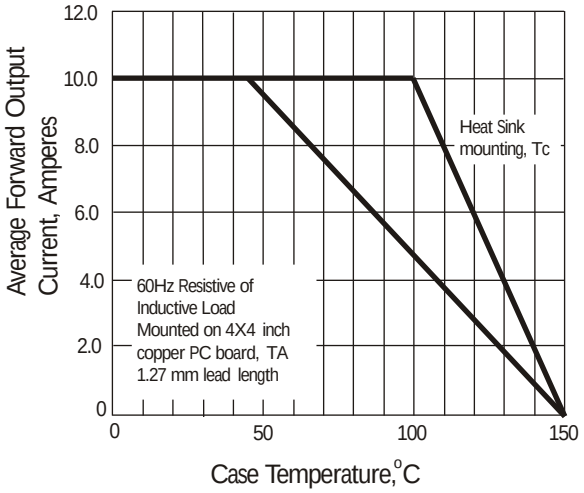


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

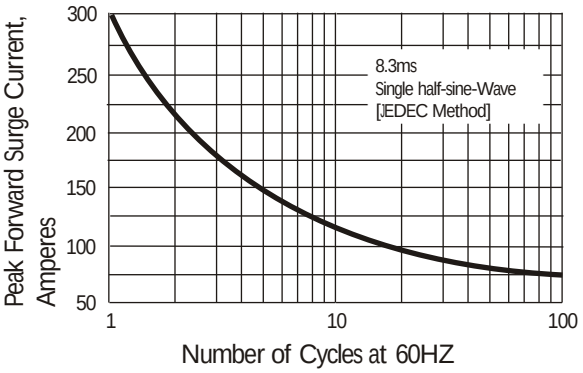


Fig. 3 Typical Instantaneous Forward Characteristics

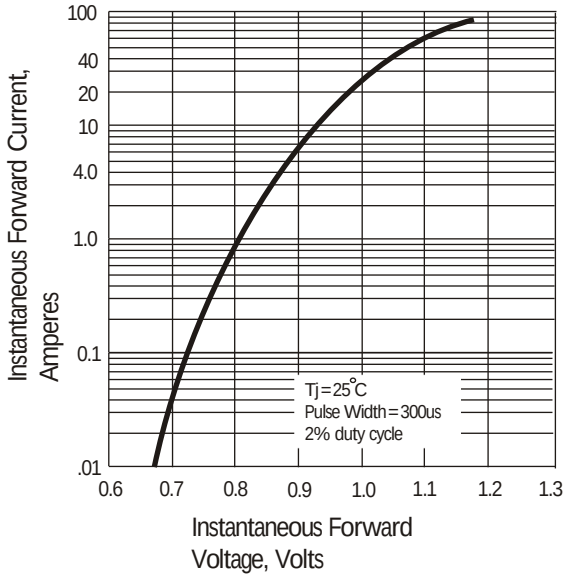


Fig. 4 Typical Reverse Characteristics

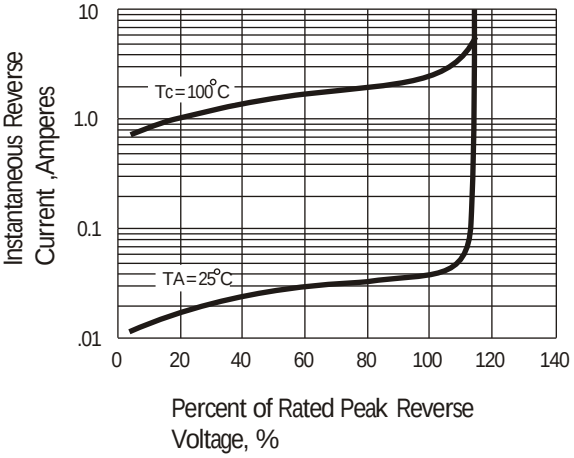


Fig. 5 Typical Junction Capacitance

