
CURRENT 3.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

1N5400 THRU 1N5408

DO-27 / DO-201AD

FEATURES

- Low coat construction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
  260 /10 secods/.375 (9.5mm)lead length at 5 lbs(2.3kg) tension

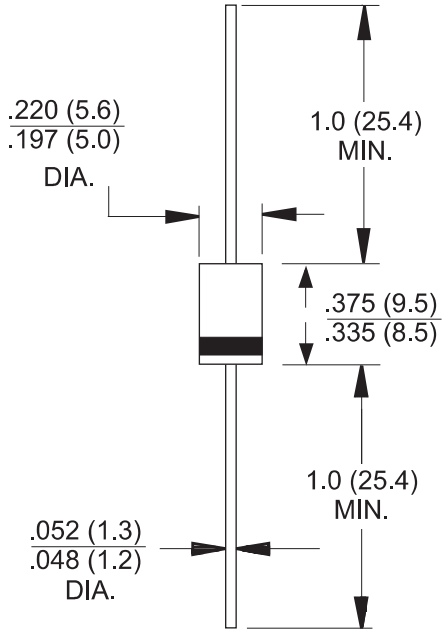

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042 ounce, 1.19 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25^{O}C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1N5400	1N5401	1N5402	1N5404	1N5406	1N5407	1N5408	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375 (9.5mm) lead length at T_A= 75	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	125							Amps
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	1.0							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element T_A = 25	I_R	5.0							µA
Maximum DC Reverse Current at Rated DC Blocking Voltage per element T_A = 150	I_R	500							µA
Maximum Full Load Reverse Current, full cycle average 0.375 (9.5mm)lead length at T_L=75	$I_{R(AV)}$	500							µA
Typical Junction Capacitance (Note 1)	C_J	40							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	30							/W
Operating Junction Temperature Range	T_J	-55 to +150							
Storage Temperature Range	T_{STG}	-55 to +150							

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
2. Thermal Resistance from junction to ambient at 0.375 (9.5mm) lead length, P.C.board mounted with 0.8" ×**0.8**" (**20**× **20mm) copper heatsink**.

CURRENT 3.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

1N5400 THRU 1N5408

RATING AND CHRACTERISTIC CURVES 1N5400 Thru 1N5408

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

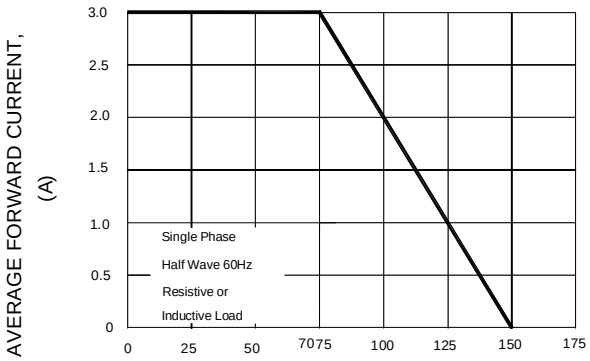


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

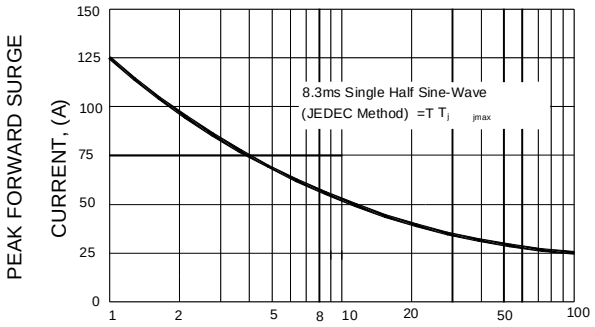


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

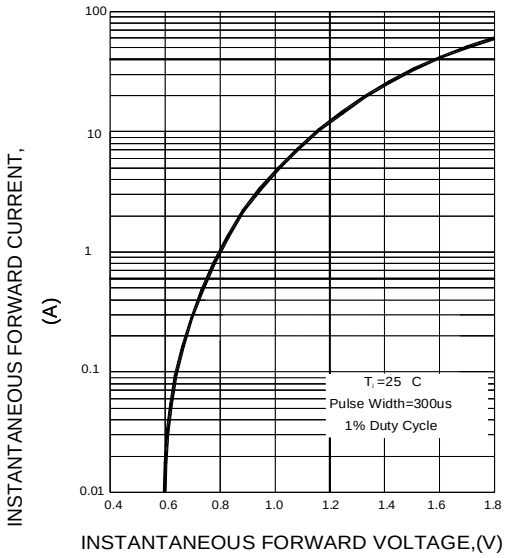


FIG.4-TYPICAL REVERSE CHARACTERISTICS

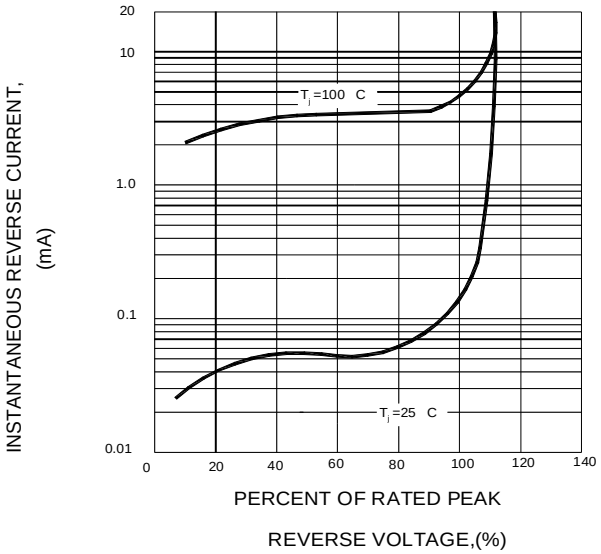


FIG.5-TYPICAL JUNCTION CAPACITANCE

