
CURRENT 1.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

F1 THRU F7

FEATURES

- Glass passivated device
- Ideal for surface mouted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed: 250℃/10 seconds,0.375”(9.5mm) lead length, 5 lbs. (2.3kg) tension

SOD-123FL

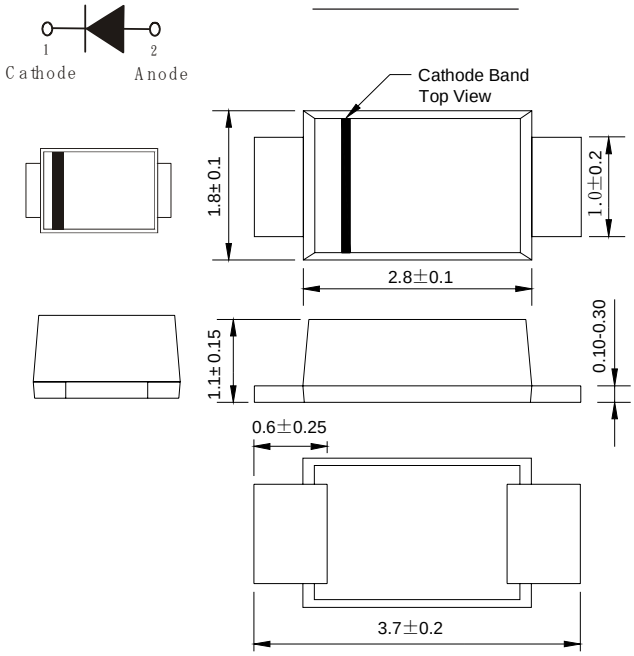

Dimensions in millimeters

MECHANICAL DATA

Case: JEDEC SOD-123FL molded plastic body over passivated chip
Terminals: Solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight:0.0007 ounce, 0.02 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	F1	F2	F3	F4	F5	F6	F7	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at T_A=65℃ (NOTE 1)	$I_{(AV)}$	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T_L=25℃	I_{FSM}	25.0							Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.3							Volts
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=125℃	I_R	10.0 50.0							μA
Maximum reverse recovery time (NOTE 2)	trr	150				250	500		ns
Typical junction capacitance (NOTE 3)	C_J	4							pF
Typical thermal resistance (NOTE 4)	$R_{\theta JA}$	180							°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-50 to +150							°C

Note: 1.Averaged over any 20ms period.
2.Measured with IF=0.5A, IR=1A, Irr=0.25A.
3.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
4.Thermal resistance junction to ambient, 6.0 mm2 coppeer pads to each terminal.

CURRENT 1.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

F1 THRU F7

RATING AND CHRACTERISTIC CURVES F1 Thru F7

FIG.1 –TYPICAL FORWARD CHARACTERISTIC

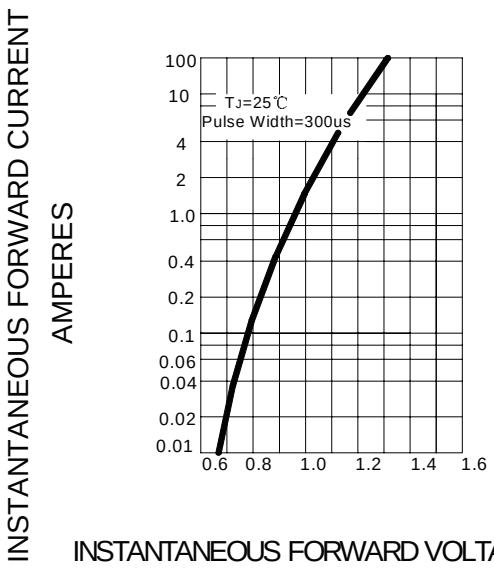


FIG.2 – TYPICAL JUNCTION CAPACITANCE

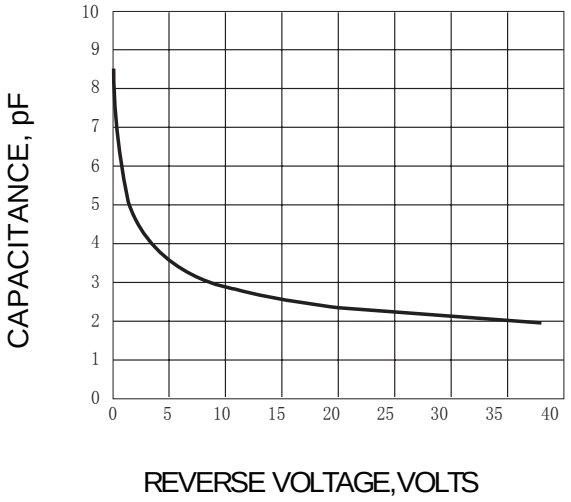


FIG.3 – TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS


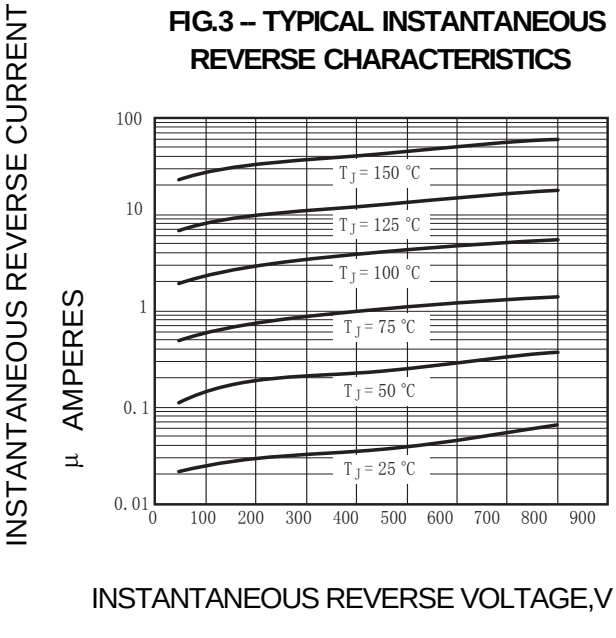


FIG.4 – FORWARD DERATING CURVE

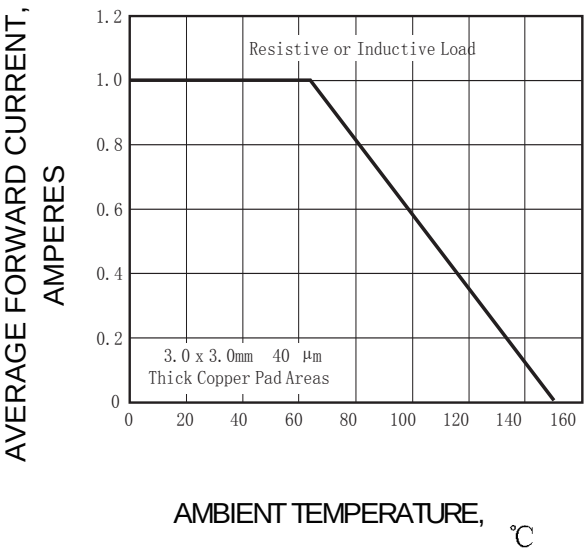

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!