
CURRENT 6.0 Ampere
VOLTAGE RANG 20 to 100 Volts

SS62B THRU SS610B

Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-O

DO-214AA (SMB)

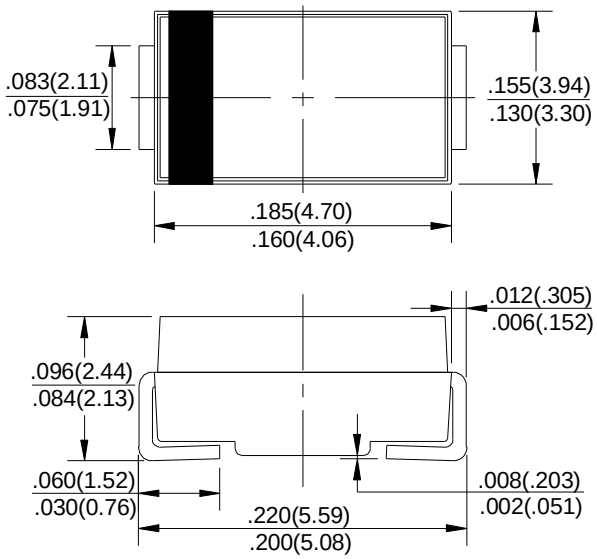

Dimensions in inches and (millimeters)

Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

Maximum Ratings and Electrical Characteristics

T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SS62	SS63	SS64	SS65	SS66	SS68	SS69	SS610	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	50	60	80	90	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	56	64	71	V
Average Rectified Output Current @T_L = 90°C	I_O	6.0								A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150								A
Forward Voltage @I_F = 6.0A	V_{FM}	0.55			0.70		0.85			V
Peak Reverse Current @T_A = 25°C	I_{RM}	1.0								mA
Typical Thermal Resistance (Note 1)	$R_{\theta JL}$ $R_{\theta JA}$	17 55								°C/W
Operating Temperature Range	T_j	-65 to +125								°C
Storage Temperature Range	T_{STG}	-65 to +150								°C
Typical Junction capacitance(NOTE1)	C_J	300								PF

Note: 1. Mounted on P.C. Board with 14mm^2 copper pad area.

2.Measured at 1.0 MHZ and applied reverse voltage of 4.0 v

CURRENT 6.0 Ampere
VOLTAGE RANG 20 to 100 Volts

SS62B THRU SS610B

RATING AND CHRACTERISTIC CURVES SS62 Thru SS610

FIG. 1 - FORWARD CURRENT DERATING CURVE

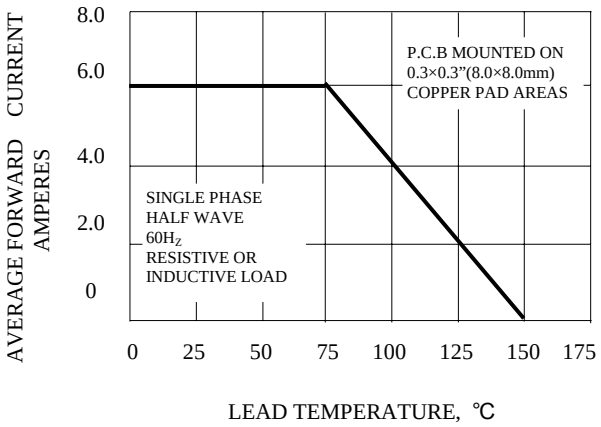


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

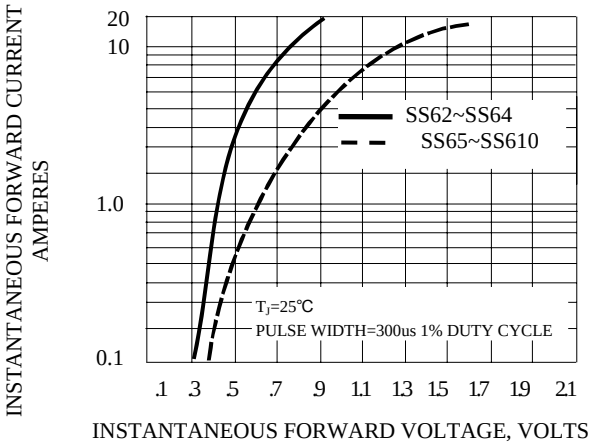


FIG. 3A - TYPICAL REVERSE CHARACTERISTICS

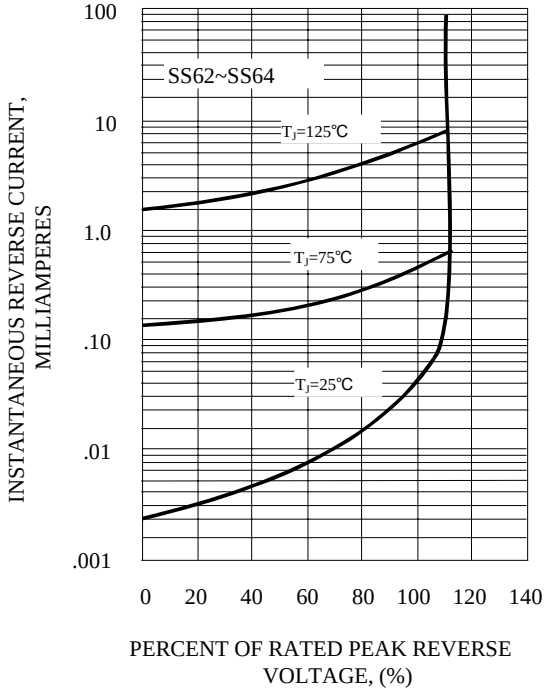


FIG. 3B - TYPICAL REVERSE CHARACTERISTICS

